

GOLF HOG RACK ASSEMBLY

www.golfhograck.com




1. Bolt side plates onto the rack (outside of bracket). Do not tighten the bolts at this time.



2. Snap into place on rear docking points; tighten bolts on side plates.



3. Put slip-lok on webbing 8" from an end.

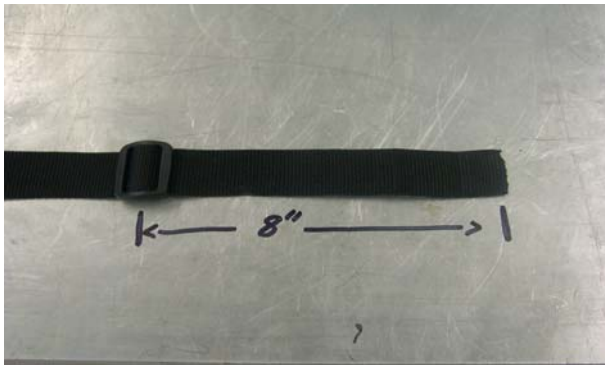

4. Wrap the 8" length of the strap around the side post (between the curved tubes) and thread through slip-lok. Repeat for top and bottom of each side of rack.



GOLF HOG RACK ASSEMBLY



6. Attach locking buckles at other end of straps. Back weave, to secure.



WARNING:

RUN, BRAKE & TURN SIGNALS MUST BE VISIBLE FROM REAR WHEN USING THIS PRODUCT



5. VERY IMPORTANT – weave webbing over and back through slip-lok to lock in place.



← 7. The Golf Hog Rack is ready for your golf bag. Snap buckles and tighten strapping.



Check your strapping periodically for damage due to cutting or fraying. Do not store in extreme temperature or sunlight.

Replace all damaged or worn goods immediately.